

TEST DATA OF SUS1R50505

Regulated DC Power Supply
Sep 13, 2004

Approved by : Tetsuo Sugimori
Tetsuo Sugimori Design Manager

Prepared by : Masahiro Shima
Masahiro Shima Design Engineer

COSEL CO.,LTD.



CONTENTS

1.Input Current (by Input Voltage)	1
2.Input Current (by Load Current)	2
3.Input Power (by Load Current)	3
4.Efficiency (by Input Voltage)	4
5.Efficiency (by Load Current)	5
6.Line Regulation	6
7.Load Regulation	7
8.Dynamic Load Response	8
9.Ripple Voltage (by Load Current)	9
10.Ripple-Noise	10
11.Ripple Voltage (by Ambient Temperature)	11
12.Ambient Temperature Drift	12
13.Output Voltage Accuracy	13
14.Time Lapse Drift	14
15.Rise and Fall Time	15
16.Minimum Input Voltage for Regulated Output Voltage	16
17.Overcurrent Protection	17
18.Figure of Testing Circuitry	18

(Final Page 18)



Model		SUS1R50505		Temperature		25°C																																																																								
Item		Input Current (by Input Voltage)		Testing Circuitry		Figure A																																																																								
Object		_____																																																																												
1. Graph				2. Values																																																																										
<p>Legend: —△— Load 100% - - □ - - Load 50% - - ○ - - Load 0%</p>				<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Load 0%</th> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>1.7</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>2.0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>2.5</td><td>0.041</td><td>0.531</td><td>0.714</td></tr> <tr><td>3.0</td><td>0.037</td><td>0.389</td><td>0.739</td></tr> <tr><td>3.3</td><td>0.035</td><td>0.331</td><td>0.743</td></tr> <tr><td>4.0</td><td>0.033</td><td>0.261</td><td>0.542</td></tr> <tr><td>4.5</td><td>0.031</td><td>0.231</td><td>0.467</td></tr> <tr><td>5.0</td><td>0.030</td><td>0.208</td><td>0.407</td></tr> <tr><td>6.0</td><td>0.028</td><td>0.175</td><td>0.330</td></tr> <tr><td>7.0</td><td>0.027</td><td>0.152</td><td>0.283</td></tr> <tr><td>8.0</td><td>0.026</td><td>0.136</td><td>0.248</td></tr> <tr><td>9.0</td><td>0.026</td><td>0.125</td><td>0.224</td></tr> <tr><td>10.0</td><td>0.026</td><td>0.116</td><td>0.204</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>				Input Voltage [V]	Input Current [A]			Load 0%	Load 50%	Load 100%	0	0.000	0.000	0.000	1.7	0.000	0.000	0.000	2.0	0.000	0.000	0.000	2.5	0.041	0.531	0.714	3.0	0.037	0.389	0.739	3.3	0.035	0.331	0.743	4.0	0.033	0.261	0.542	4.5	0.031	0.231	0.467	5.0	0.030	0.208	0.407	6.0	0.028	0.175	0.330	7.0	0.027	0.152	0.283	8.0	0.026	0.136	0.248	9.0	0.026	0.125	0.224	10.0	0.026	0.116	0.204	-	-	-	-	-	-	-	-
Input Voltage [V]	Input Current [A]																																																																													
	Load 0%	Load 50%	Load 100%																																																																											
0	0.000	0.000	0.000																																																																											
1.7	0.000	0.000	0.000																																																																											
2.0	0.000	0.000	0.000																																																																											
2.5	0.041	0.531	0.714																																																																											
3.0	0.037	0.389	0.739																																																																											
3.3	0.035	0.331	0.743																																																																											
4.0	0.033	0.261	0.542																																																																											
4.5	0.031	0.231	0.467																																																																											
5.0	0.030	0.208	0.407																																																																											
6.0	0.028	0.175	0.330																																																																											
7.0	0.027	0.152	0.283																																																																											
8.0	0.026	0.136	0.248																																																																											
9.0	0.026	0.125	0.224																																																																											
10.0	0.026	0.116	0.204																																																																											
-	-	-	-																																																																											
-	-	-	-																																																																											
<p>Note: Slanted line shows the range of the rated input voltage.</p>																																																																														



Model		SUS1R50505		Temperature 25°C																																																				
Item		Input Current (by Load Current)		Testing Circuitry Figure A																																																				
Object		_____																																																						
1.Graph		—△— Input Volt. 4.5V - - □ - - Input Volt. 5V - · - ○ - · - Input Volt. 9V		2.Values																																																				
				<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Input Volt. 4.5[V]</th> <th>Input Volt. 5[V]</th> <th>Input Volt. 9[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.031</td><td>0.030</td><td>0.026</td></tr> <tr><td>0.06</td><td>0.109</td><td>0.101</td><td>0.068</td></tr> <tr><td>0.12</td><td>0.190</td><td>0.172</td><td>0.106</td></tr> <tr><td>0.18</td><td>0.271</td><td>0.243</td><td>0.144</td></tr> <tr><td>0.24</td><td>0.365</td><td>0.324</td><td>0.183</td></tr> <tr><td>0.30</td><td>0.457</td><td>0.400</td><td>0.223</td></tr> <tr><td>0.33</td><td>0.511</td><td>0.445</td><td>0.243</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Current [A]	Input Current [A]			Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]	0.00	0.031	0.030	0.026	0.06	0.109	0.101	0.068	0.12	0.190	0.172	0.106	0.18	0.271	0.243	0.144	0.24	0.365	0.324	0.183	0.30	0.457	0.400	0.223	0.33	0.511	0.445	0.243	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Load Current [A]	Input Current [A]																																																							
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]																																																					
0.00	0.031	0.030	0.026																																																					
0.06	0.109	0.101	0.068																																																					
0.12	0.190	0.172	0.106																																																					
0.18	0.271	0.243	0.144																																																					
0.24	0.365	0.324	0.183																																																					
0.30	0.457	0.400	0.223																																																					
0.33	0.511	0.445	0.243																																																					
-	-	-	-																																																					
-	-	-	-																																																					
-	-	-	-																																																					
-	-	-	-																																																					
Note: Slanted line shows the range of the rated load current.																																																								



<table border="1"> <tr> <td>Model</td> <td>SUS1R50505</td> </tr> <tr> <td>Item</td> <td>Input Power (by Load Current)</td> </tr> <tr> <td>Object</td> <td>_____</td> </tr> </table>		Model	SUS1R50505	Item	Input Power (by Load Current)	Object	_____	Temperature 25°C Testing Circuitry Figure A																																													
Model	SUS1R50505																																																				
Item	Input Power (by Load Current)																																																				
Object	_____																																																				
1.Graph <ul style="list-style-type: none"> —△— Input Volt. 4.5V - - -□- - - Input Volt. 5V - · -○- · - Input Volt. 9V 		2.Values																																																			
		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Power [W]</th> </tr> <tr> <th>Input Volt. 4.5[V]</th> <th>Input Volt. 5[V]</th> <th>Input Volt. 9[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.14</td><td>0.15</td><td>0.23</td></tr> <tr><td>0.06</td><td>0.49</td><td>0.50</td><td>0.61</td></tr> <tr><td>0.12</td><td>0.84</td><td>0.85</td><td>0.96</td></tr> <tr><td>0.18</td><td>1.21</td><td>1.21</td><td>1.30</td></tr> <tr><td>0.24</td><td>1.61</td><td>1.59</td><td>1.65</td></tr> <tr><td>0.30</td><td>2.03</td><td>1.98</td><td>2.00</td></tr> <tr><td>0.33</td><td>2.25</td><td>2.19</td><td>2.17</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Input Power [W]			Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]	0.00	0.14	0.15	0.23	0.06	0.49	0.50	0.61	0.12	0.84	0.85	0.96	0.18	1.21	1.21	1.30	0.24	1.61	1.59	1.65	0.30	2.03	1.98	2.00	0.33	2.25	2.19	2.17	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Load Current [A]	Input Power [W]																																																				
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]																																																		
0.00	0.14	0.15	0.23																																																		
0.06	0.49	0.50	0.61																																																		
0.12	0.84	0.85	0.96																																																		
0.18	1.21	1.21	1.30																																																		
0.24	1.61	1.59	1.65																																																		
0.30	2.03	1.98	2.00																																																		
0.33	2.25	2.19	2.17																																																		
-	-	-	-																																																		
-	-	-	-																																																		
-	-	-	-																																																		
-	-	-	-																																																		
Note: Slanted line shows the range of the rated load current.																																																					



Model		SUS1R50505		Temperature 25°C																																	
Item		Efficiency (by Input Voltage)		Testing Circuitry Figure A																																	
Object																																					
1.Graph			2.Values																																		
<p>---□--- Load 50% —△— Load 100%</p>			<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Efficiency [%]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>4.0</td><td>73.5</td><td>71.0</td></tr> <tr><td>4.5</td><td>73.6</td><td>73.6</td></tr> <tr><td>5.0</td><td>73.5</td><td>75.5</td></tr> <tr><td>6.0</td><td>72.4</td><td>76.7</td></tr> <tr><td>7.0</td><td>70.8</td><td>76.9</td></tr> <tr><td>8.0</td><td>69.1</td><td>76.5</td></tr> <tr><td>9.0</td><td>67.1</td><td>75.4</td></tr> <tr><td>10.0</td><td>65.1</td><td>74.4</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>			Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	4.0	73.5	71.0	4.5	73.6	73.6	5.0	73.5	75.5	6.0	72.4	76.7	7.0	70.8	76.9	8.0	69.1	76.5	9.0	67.1	75.4	10.0	65.1	74.4	--	-	-
Input Voltage [V]	Efficiency [%]																																				
	Load 50%	Load 100%																																			
4.0	73.5	71.0																																			
4.5	73.6	73.6																																			
5.0	73.5	75.5																																			
6.0	72.4	76.7																																			
7.0	70.8	76.9																																			
8.0	69.1	76.5																																			
9.0	67.1	75.4																																			
10.0	65.1	74.4																																			
--	-	-																																			
<p>Note: Slanted line shows the range of the rated input voltage.</p>																																					



Model		SUS1R50505		Temperature 25°C																																																				
Item		Efficiency (by Load Current)		Testing Circuitry Figure A																																																				
Object		_____																																																						
1.Graph		—△— Input Volt. 4.5V - - -□- - - Input Volt. 5V - - -○- - - Input Volt. 9V		2.Values																																																				
				<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Efficiency [%]</th> </tr> <tr> <th>Input Volt. 4.5[V]</th> <th>Input Volt. 5[V]</th> <th>Input Volt. 9[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>0.06</td><td>61.9</td><td>60.7</td><td>50.1</td></tr> <tr><td>0.12</td><td>71.6</td><td>71.2</td><td>63.2</td></tr> <tr><td>0.18</td><td>74.5</td><td>74.6</td><td>69.6</td></tr> <tr><td>0.24</td><td>74.7</td><td>75.6</td><td>73.1</td></tr> <tr><td>0.30</td><td>73.9</td><td>75.6</td><td>75.2</td></tr> <tr><td>0.33</td><td>73.3</td><td>75.3</td><td>76.0</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Current [A]	Efficiency [%]			Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]	0.00	-	-	-	0.06	61.9	60.7	50.1	0.12	71.6	71.2	63.2	0.18	74.5	74.6	69.6	0.24	74.7	75.6	73.1	0.30	73.9	75.6	75.2	0.33	73.3	75.3	76.0	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Efficiency [%]																																																							
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]																																																					
0.00	-	-	-																																																					
0.06	61.9	60.7	50.1																																																					
0.12	71.6	71.2	63.2																																																					
0.18	74.5	74.6	69.6																																																					
0.24	74.7	75.6	73.1																																																					
0.30	73.9	75.6	75.2																																																					
0.33	73.3	75.3	76.0																																																					
--	-	-	-																																																					
--	-	-	-																																																					
--	-	-	-																																																					
--	-	-	-																																																					
Note: Slanted line shows the range of the rated load current.																																																								



<p>Model SUS1R50505</p>		<p>Temperature 25°C Testing Circuitry Figure A</p>																																
<p>Item Line Regulation</p>																																		
<p>Object +5V0.3A</p>																																		
<p>1.Graph</p> <p>---□--- Load 50% —△— Load 100%</p> <p>Output Voltage [V]</p> <p>Input Voltage [V]</p> <p>Note: Slanted line shows the range of the rated input voltage.</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Output Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>4.0</td><td>5.011</td><td>5.004</td></tr> <tr><td>4.5</td><td>5.012</td><td>5.008</td></tr> <tr><td>5.0</td><td>5.012</td><td>5.009</td></tr> <tr><td>6.0</td><td>5.012</td><td>5.009</td></tr> <tr><td>7.0</td><td>5.012</td><td>5.009</td></tr> <tr><td>8.0</td><td>5.012</td><td>5.009</td></tr> <tr><td>9.0</td><td>5.012</td><td>5.010</td></tr> <tr><td>10.0</td><td>5.012</td><td>5.010</td></tr> <tr><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	4.0	5.011	5.004	4.5	5.012	5.008	5.0	5.012	5.009	6.0	5.012	5.009	7.0	5.012	5.009	8.0	5.012	5.009	9.0	5.012	5.010	10.0	5.012	5.010	-	-	-
Input Voltage [V]	Output Voltage [V]																																	
	Load 50%	Load 100%																																
4.0	5.011	5.004																																
4.5	5.012	5.008																																
5.0	5.012	5.009																																
6.0	5.012	5.009																																
7.0	5.012	5.009																																
8.0	5.012	5.009																																
9.0	5.012	5.010																																
10.0	5.012	5.010																																
-	-	-																																




Model SUS1R50505		Temperature 25°C Testing Circuitry Figure A																																																		
Item Load Regulation																																																				
Object +5V0.3A																																																				
1. Graph <div style="display: flex; justify-content: space-between; margin-top: 10px;"> <div style="width: 45%;"> </div> <div style="width: 45%;"> 2. Values <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 4.5[V]</th> <th>Input Volt. 5[V]</th> <th>Input Volt. 9[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>5.013</td><td>5.013</td><td>5.013</td></tr> <tr><td>0.06</td><td>5.013</td><td>5.013</td><td>5.013</td></tr> <tr><td>0.12</td><td>5.012</td><td>5.012</td><td>5.012</td></tr> <tr><td>0.18</td><td>5.012</td><td>5.012</td><td>5.012</td></tr> <tr><td>0.24</td><td>5.011</td><td>5.011</td><td>5.011</td></tr> <tr><td>0.30</td><td>5.008</td><td>5.010</td><td>5.010</td></tr> <tr><td>0.33</td><td>5.005</td><td>5.008</td><td>5.010</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table> </div> </div>		Load Current [A]	Output Voltage [V]			Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]	0.00	5.013	5.013	5.013	0.06	5.013	5.013	5.013	0.12	5.012	5.012	5.012	0.18	5.012	5.012	5.012	0.24	5.011	5.011	5.011	0.30	5.008	5.010	5.010	0.33	5.005	5.008	5.010	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Output Voltage [V]																																																			
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]																																																	
0.00	5.013	5.013	5.013																																																	
0.06	5.013	5.013	5.013																																																	
0.12	5.012	5.012	5.012																																																	
0.18	5.012	5.012	5.012																																																	
0.24	5.011	5.011	5.011																																																	
0.30	5.008	5.010	5.010																																																	
0.33	5.005	5.008	5.010																																																	
--	-	-	-																																																	
--	-	-	-																																																	
--	-	-	-																																																	
--	-	-	-																																																	
Note: Slanted line shows the range of the rated load current.																																																				





Model		SUS1R50505	
Item		Dynamic Load Response	
Object		+5V0.3A	
		Temperature	25°C
		Testing Circuitry	Figure A



Input Volt. 5 V
 Cycle 100 mS

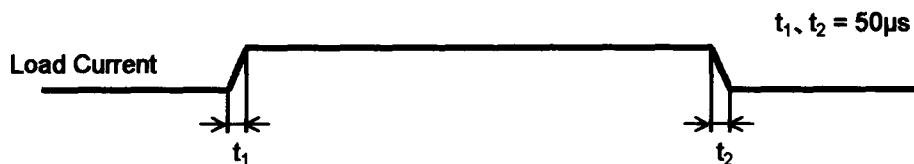



Min. Load (0A) ←→
 Load 100% (0.3A)

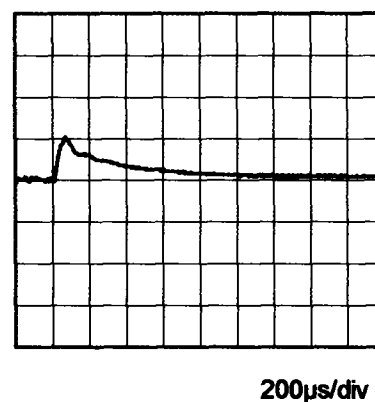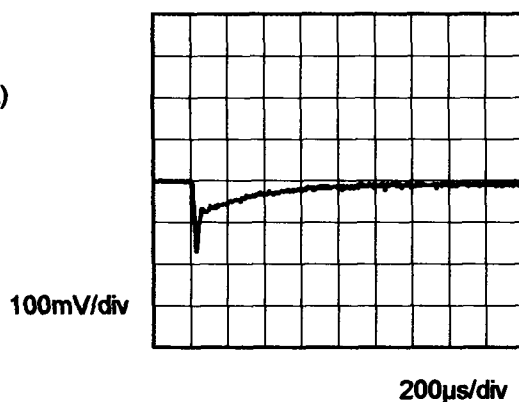

Min. Load (0A) ←→
 Load 50% (0.15A)

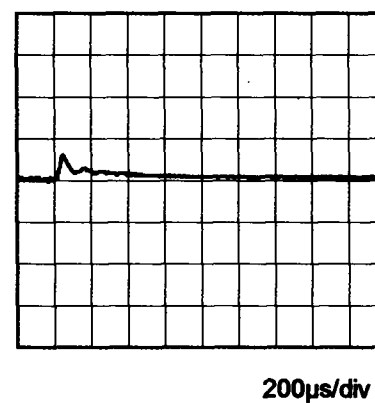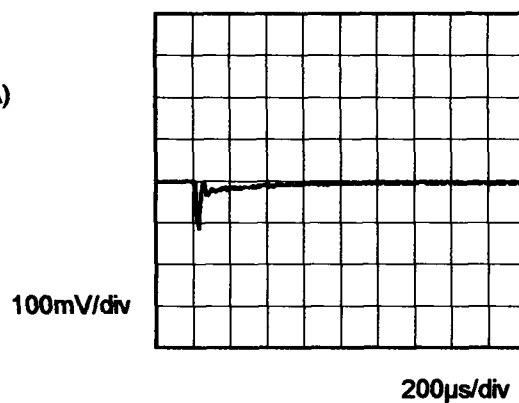

Load 50% (0.15A) ←→
 Load 100% (0.3A)

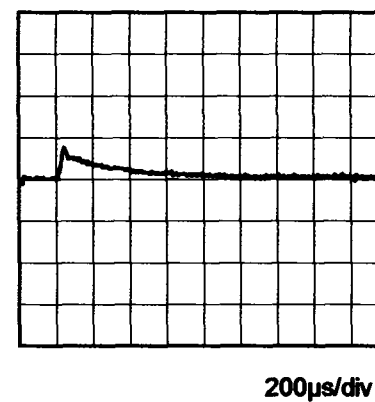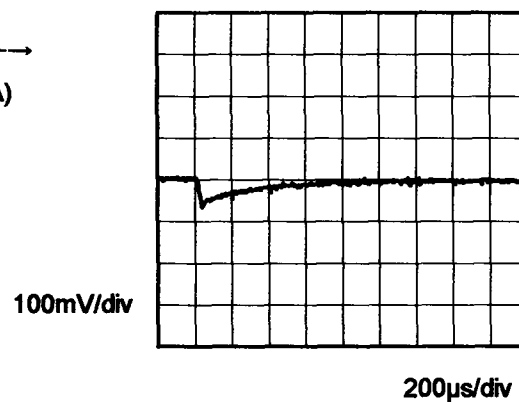



Model		SUS1R50505		Temperature		25°C																																							
Item		Ripple Voltage (by Load Current)		Testing Circuitry		Figure B																																							
Object		+5V0.3A																																											
1. Graph				2. Values																																									
<p> —△— Input Volt. 4.5V - - ○ - - Input Volt. 9V </p> <p> Measured by 100 MHz Oscilloscope. Ripple Voltage is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current. </p>				<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="2">Ripple Voltage [mV]</th> </tr> <tr> <th>Input Volt. 4.5 [V]</th> <th>Input Volt. 9 [V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>3</td><td>4</td></tr> <tr><td>0.06</td><td>3</td><td>4</td></tr> <tr><td>0.12</td><td>3</td><td>4</td></tr> <tr><td>0.18</td><td>4</td><td>4</td></tr> <tr><td>0.24</td><td>4</td><td>4</td></tr> <tr><td>0.30</td><td>5</td><td>4</td></tr> <tr><td>0.33</td><td>7</td><td>4</td></tr> <tr><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>				Load Current [A]	Ripple Voltage [mV]		Input Volt. 4.5 [V]	Input Volt. 9 [V]	0.00	3	4	0.06	3	4	0.12	3	4	0.18	4	4	0.24	4	4	0.30	5	4	0.33	7	4	-	-	-	-	-	-	-	-	-	-	-	-
Load Current [A]	Ripple Voltage [mV]																																												
	Input Volt. 4.5 [V]	Input Volt. 9 [V]																																											
0.00	3	4																																											
0.06	3	4																																											
0.12	3	4																																											
0.18	4	4																																											
0.24	4	4																																											
0.30	5	4																																											
0.33	7	4																																											
-	-	-																																											
-	-	-																																											
-	-	-																																											
-	-	-																																											
<p>Ripple [mVp-p]</p> <p>Fig. Complex Ripple Wave Form</p>																																													



Model		SUS1R50505		Temperature 25°C																																							
Item		Ripple-Noise		Testing Circuitry Figure B																																							
Object		+5V0.3A																																									
1.Graph			2.Values																																								
<p> —△— Input Volt. 4.5V - - ○ - - - Input Volt. 9V </p> <p> Measured by 100 MHz Oscilloscope. Ripple-Noise is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current. </p>			<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="2">Ripple-Noise [mV]</th> </tr> <tr> <th>Input Volt. 4.5 [V]</th> <th>Input Volt. 9 [V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>5</td><td>6</td></tr> <tr><td>0.06</td><td>6</td><td>6</td></tr> <tr><td>0.12</td><td>6</td><td>7</td></tr> <tr><td>0.18</td><td>7</td><td>7</td></tr> <tr><td>0.24</td><td>8</td><td>8</td></tr> <tr><td>0.30</td><td>9</td><td>9</td></tr> <tr><td>0.33</td><td>11</td><td>9</td></tr> <tr><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Load Current [A]	Ripple-Noise [mV]		Input Volt. 4.5 [V]	Input Volt. 9 [V]	0.00	5	6	0.06	6	6	0.12	6	7	0.18	7	7	0.24	8	8	0.30	9	9	0.33	11	9	-	-	-	-	-	-	-	-	-	-	-	-
Load Current [A]	Ripple-Noise [mV]																																										
	Input Volt. 4.5 [V]	Input Volt. 9 [V]																																									
0.00	5	6																																									
0.06	6	6																																									
0.12	6	7																																									
0.18	7	7																																									
0.24	8	8																																									
0.30	9	9																																									
0.33	11	9																																									
-	-	-																																									
-	-	-																																									
-	-	-																																									
-	-	-																																									
<p>Fig.Complex Ripple Noise Wave Form</p>																																											



Model SUS1R50505		Testing Circuitry Figure B																																						
Item	Ripple Voltage (by Ambient Temp.)																																							
Object	+5V0.3A																																							
<p>1.Graph</p> <p> ---□--- Load 50% —△— Load 100% </p> <p> Y-axis: Ripple Voltage [mV] X-axis: Ambient Temperature [°C] Input Volt. 5V </p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="2">Ripple Voltage [mV]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>-60</td><td>6</td><td>9</td></tr> <tr><td>-40</td><td>6</td><td>8</td></tr> <tr><td>-20</td><td>5</td><td>7</td></tr> <tr><td>0</td><td>4</td><td>6</td></tr> <tr><td>25</td><td>3</td><td>5</td></tr> <tr><td>55</td><td>2</td><td>4</td></tr> <tr><td>60</td><td>2</td><td>4</td></tr> <tr><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Ambient Temperature [°C]	Ripple Voltage [mV]		Load 50%	Load 100%	-60	6	9	-40	6	8	-20	5	7	0	4	6	25	3	5	55	2	4	60	2	4	-	-	-	-	-	-	-	-	-	-	-	-
Ambient Temperature [°C]	Ripple Voltage [mV]																																							
	Load 50%	Load 100%																																						
-60	6	9																																						
-40	6	8																																						
-20	5	7																																						
0	4	6																																						
25	3	5																																						
55	2	4																																						
60	2	4																																						
-	-	-																																						
-	-	-																																						
-	-	-																																						
-	-	-																																						
<p>Measured by 100 MHz Oscilloscope. Note: Slanted line shows the range of the rated ambient temperature.</p>																																								



Model		SUS1R50505																																																						
Item		Ambient Temperature Drift		Testing Circuitry Figure A																																																				
Object		+5V0.3A																																																						
1.Graph		—△— Input Volt. 4.5V - - - □ - - - Input Volt. 5V - · - ○ - · - - Input Volt. 9V		2.Values																																																				
<p>Output Voltage [V]</p> <p>Ambient Temperature [°C]</p> <p>Load 100%</p>		<table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 4.5[V]</th> <th>Input Volt. 5[V]</th> <th>Input Volt. 9[V]</th> </tr> </thead> <tbody> <tr><td>-60</td><td>5.005</td><td>5.006</td><td>5.007</td></tr> <tr><td>-40</td><td>5.011</td><td>5.011</td><td>5.012</td></tr> <tr><td>-20</td><td>5.013</td><td>5.013</td><td>5.014</td></tr> <tr><td>0</td><td>5.012</td><td>5.012</td><td>5.013</td></tr> <tr><td>25</td><td>5.009</td><td>5.010</td><td>5.010</td></tr> <tr><td>55</td><td>5.002</td><td>5.002</td><td>5.003</td></tr> <tr><td>60</td><td>5.000</td><td>5.000</td><td>5.001</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>				Ambient Temperature [°C]	Output Voltage [V]			Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]	-60	5.005	5.006	5.007	-40	5.011	5.011	5.012	-20	5.013	5.013	5.014	0	5.012	5.012	5.013	25	5.009	5.010	5.010	55	5.002	5.002	5.003	60	5.000	5.000	5.001	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ambient Temperature [°C]	Output Voltage [V]																																																							
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]																																																					
-60	5.005	5.006	5.007																																																					
-40	5.011	5.011	5.012																																																					
-20	5.013	5.013	5.014																																																					
0	5.012	5.012	5.013																																																					
25	5.009	5.010	5.010																																																					
55	5.002	5.002	5.003																																																					
60	5.000	5.000	5.001																																																					
-	-	-	-																																																					
-	-	-	-																																																					
-	-	-	-																																																					
-	-	-	-																																																					
<p>Note: Slanted line shows the range of the rated ambient temperature.</p>																																																								



COSEL		
Model	SUS1R50505	
Item	Output Voltage Accuracy	Testing Circuitry Figure A
Object	+5V0.3A	

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

- Temperature : -40 - 55°C
- Input Voltage : 4.5 - 9V
- Load Current : 0 - 0.3A

* Output Voltage Accuracy = $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

* Output Voltage Accuracy (Ration) = $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

2. Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ration [%]
Maximum Voltage	-20	4.5	0	5.017	±8	±0.2
Minimum Voltage	55	4.5	0.3	5.002		




COSEL																								
Model	SUS1R50505																							
Item	Time Lapse Drift	Temperature 25°C Testing Circuitry Figure A																						
Object	+5V0.3A																							
<p>1.Graph</p> <p style="text-align: center;">Time [H]</p> <p>Input Volt. 5V Load 100%</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>5.001</td></tr> <tr><td>0.5</td><td>4.999</td></tr> <tr><td>1.0</td><td>4.999</td></tr> <tr><td>2.0</td><td>4.999</td></tr> <tr><td>3.0</td><td>4.998</td></tr> <tr><td>4.0</td><td>4.998</td></tr> <tr><td>5.0</td><td>4.998</td></tr> <tr><td>6.0</td><td>4.998</td></tr> <tr><td>7.0</td><td>4.999</td></tr> <tr><td>8.0</td><td>5.000</td></tr> </tbody> </table>	Time since start [H]	Output Voltage [V]	0.0	5.001	0.5	4.999	1.0	4.999	2.0	4.999	3.0	4.998	4.0	4.998	5.0	4.998	6.0	4.998	7.0	4.999	8.0	5.000
Time since start [H]	Output Voltage [V]																							
0.0	5.001																							
0.5	4.999																							
1.0	4.999																							
2.0	4.999																							
3.0	4.998																							
4.0	4.998																							
5.0	4.998																							
6.0	4.998																							
7.0	4.999																							
8.0	5.000																							




Model		SUS1R50505	
Item	Rise and Fall Time	Temperature	25°C
Object	+5V0.3A	Testing Circuitry	Figure A

1. Graph

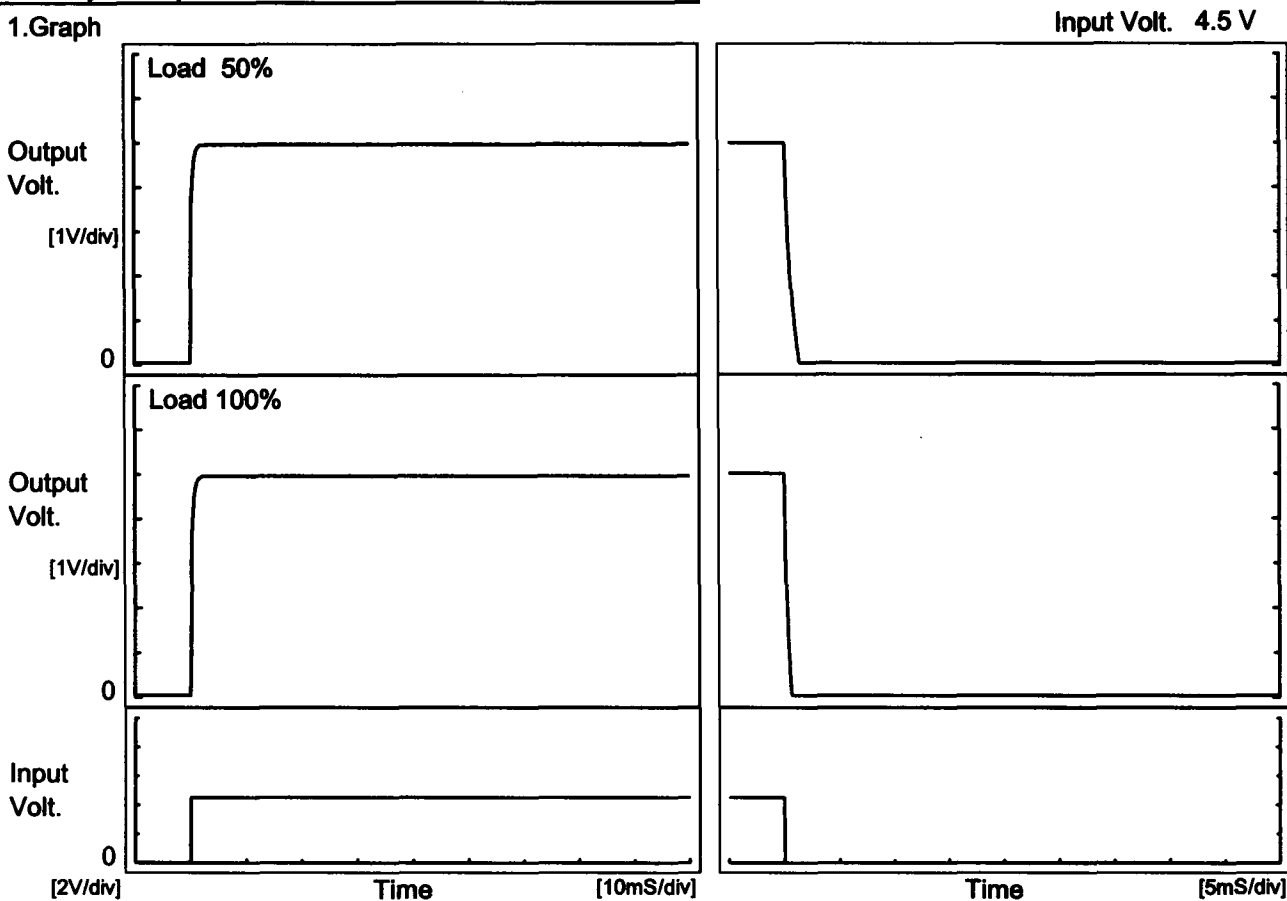

2. Values

		[mS]				
Load \ Time	Td	Tr	Ts	Th	Tf	
50 %	0.1	0.7	0.8	0.1	2.4	
100 %	0.1	0.8	0.9	0.1	1.2	

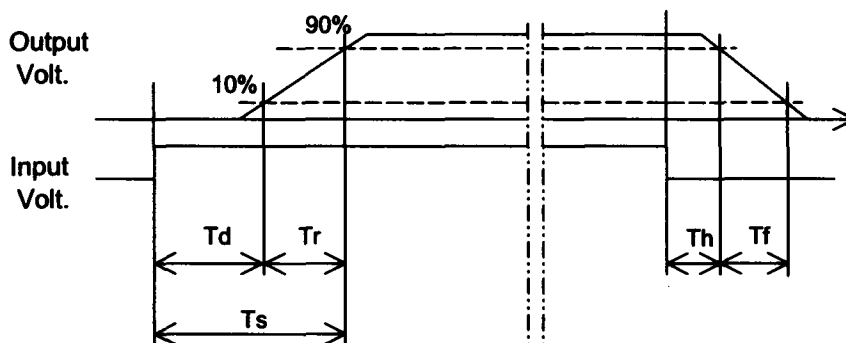



Model SUS1R50505		Testing Circuitry Figure A																																						
Item	Minimum Input Voltage for Regulated Output Voltage																																							
Object	+5V0.3A																																							
1. Graph <div style="text-align: right;"> ---□--- Load 50% —△— Load 100% </div> <p style="text-align: center;">Input Voltage [V]</p> <p style="text-align: center;">Ambient Temperature [°C]</p>		2. Values <table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="2">Input Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>-60</td><td>2.3</td><td>3.0</td></tr> <tr><td>-40</td><td>2.2</td><td>3.0</td></tr> <tr><td>-20</td><td>2.2</td><td>3.1</td></tr> <tr><td>0</td><td>2.2</td><td>3.1</td></tr> <tr><td>25</td><td>2.2</td><td>3.2</td></tr> <tr><td>55</td><td>2.2</td><td>3.3</td></tr> <tr><td>60</td><td>2.3</td><td>3.3</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>	Ambient Temperature [°C]	Input Voltage [V]		Load 50%	Load 100%	-60	2.3	3.0	-40	2.2	3.0	-20	2.2	3.1	0	2.2	3.1	25	2.2	3.2	55	2.2	3.3	60	2.3	3.3	--	-	-	--	-	-	--	-	-	--	-	-
Ambient Temperature [°C]	Input Voltage [V]																																							
	Load 50%	Load 100%																																						
-60	2.3	3.0																																						
-40	2.2	3.0																																						
-20	2.2	3.1																																						
0	2.2	3.1																																						
25	2.2	3.2																																						
55	2.2	3.3																																						
60	2.3	3.3																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
<p>Note: Slanted line shows the range of the rated ambient temperature.</p>																																								



Model SUS1R50505		Temperature 25°C Testing Circuitry Figure A																																																							
Item	Overcurrent Protection																																																								
Object	+5V0.3A																																																								
<p>1. Graph</p> <p> Input Volt. 4.5V Input Volt. 5V Input Volt. 9V </p> <p>Output Voltage [V]</p> <p>Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current.</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Output Voltage [V]</th> <th colspan="3">Load Current [A]</th> </tr> <tr> <th>Input Volt. 4.5[V]</th> <th>Input Volt. 5[V]</th> <th>Input Volt. 9[V]</th> </tr> </thead> <tbody> <tr><td>5.00</td><td>0.30</td><td>0.30</td><td>0.30</td></tr> <tr><td>4.75</td><td>0.43</td><td>0.46</td><td>0.43</td></tr> <tr><td>4.50</td><td>0.44</td><td>0.47</td><td>0.44</td></tr> <tr><td>4.00</td><td>0.47</td><td>0.50</td><td>0.45</td></tr> <tr><td>3.50</td><td>0.50</td><td>0.52</td><td>0.46</td></tr> <tr><td>3.00</td><td>0.52</td><td>0.55</td><td>0.46</td></tr> <tr><td>2.50</td><td>0.54</td><td>0.57</td><td>0.46</td></tr> <tr><td>2.00</td><td>0.57</td><td>0.58</td><td>0.45</td></tr> <tr><td>1.50</td><td>0.57</td><td>0.59</td><td>0.44</td></tr> <tr><td>1.00</td><td>0.57</td><td>0.58</td><td>0.42</td></tr> <tr><td>0.50</td><td>0.53</td><td>0.54</td><td>0.38</td></tr> <tr><td>0.00</td><td>0.49</td><td>0.53</td><td>0.39</td></tr> </tbody> </table>	Output Voltage [V]	Load Current [A]			Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]	5.00	0.30	0.30	0.30	4.75	0.43	0.46	0.43	4.50	0.44	0.47	0.44	4.00	0.47	0.50	0.45	3.50	0.50	0.52	0.46	3.00	0.52	0.55	0.46	2.50	0.54	0.57	0.46	2.00	0.57	0.58	0.45	1.50	0.57	0.59	0.44	1.00	0.57	0.58	0.42	0.50	0.53	0.54	0.38	0.00	0.49	0.53	0.39
Output Voltage [V]	Load Current [A]																																																								
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]																																																						
5.00	0.30	0.30	0.30																																																						
4.75	0.43	0.46	0.43																																																						
4.50	0.44	0.47	0.44																																																						
4.00	0.47	0.50	0.45																																																						
3.50	0.50	0.52	0.46																																																						
3.00	0.52	0.55	0.46																																																						
2.50	0.54	0.57	0.46																																																						
2.00	0.57	0.58	0.45																																																						
1.50	0.57	0.59	0.44																																																						
1.00	0.57	0.58	0.42																																																						
0.50	0.53	0.54	0.38																																																						
0.00	0.49	0.53	0.39																																																						

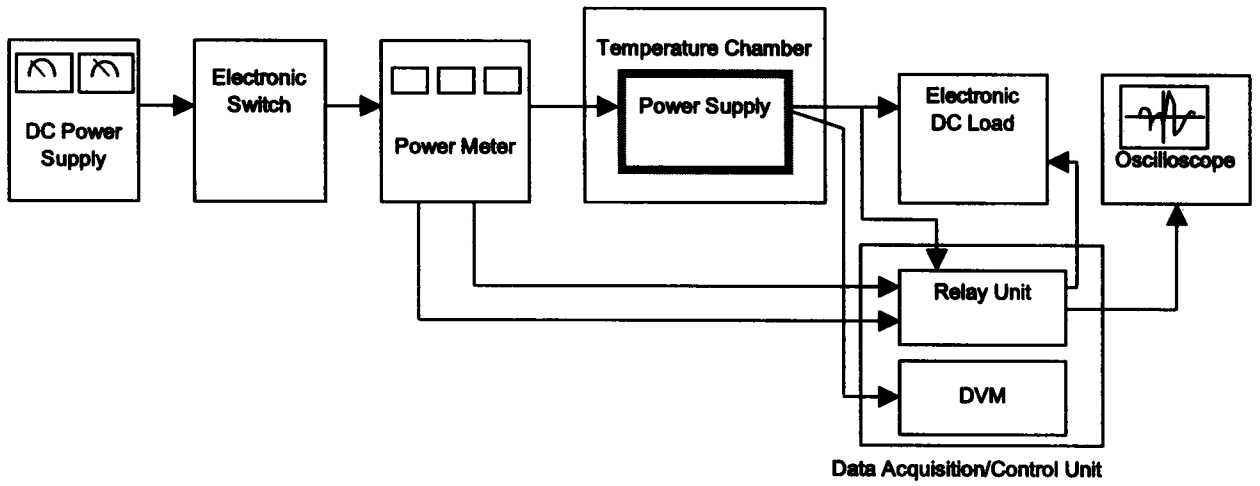


Figure A

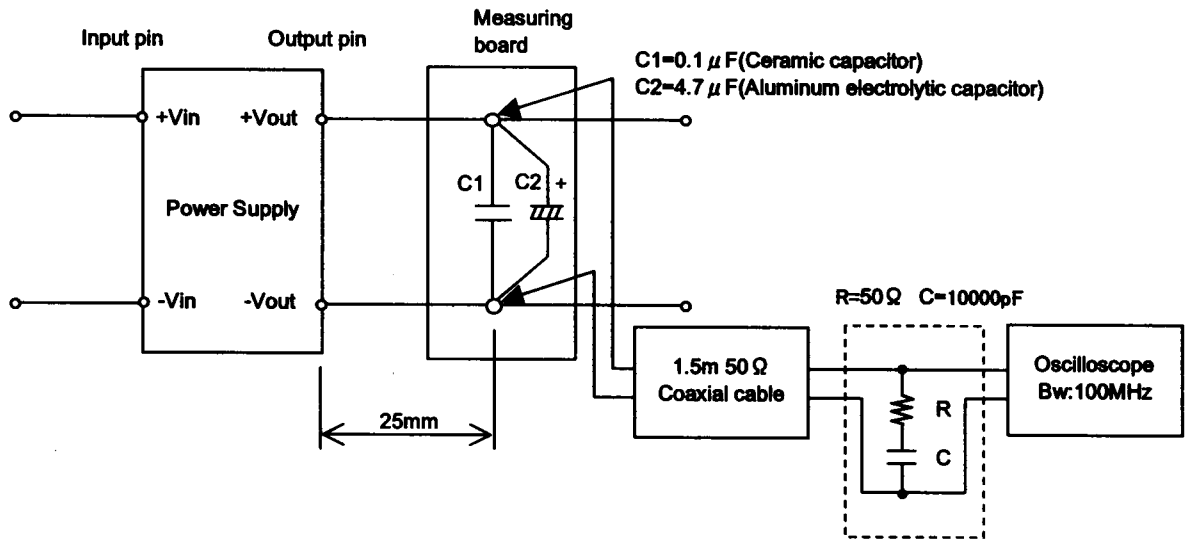


Figure B (Ripple and Ripple noise Characteristic)